



Frequency relay BA 9837, AA 9837 varimeter

0225 154

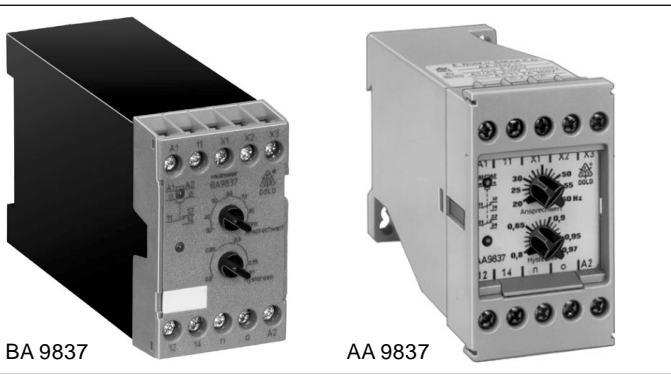


- According IEC 255, EN 60255, VDE 0435 part 303
- Detection of under- or overfrequency
- Adjustable response value
- Optionally 1 or 2 changeover contacts
- Width 45 mm


Function diagram

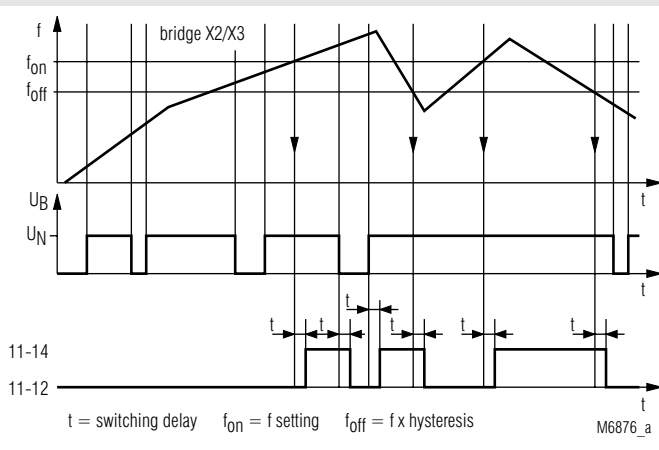

Circuit diagrams



BA 9837.11, AA 9837.11



BA 9837.12, AA 9837.12

Approvals and marking



Application

The frequency relay can be used especially in applications where the rotor frequency of a slip-ring motor must be measured. The rotor frequency is reciprocal proportional to the speed (see diagram rotor frequency at contercurrent braking). This behaviour allows to find speed depending switching values and can be used for start up and contercurrent braking of motors on cranes.

Function

The device compares 2 frequencies. The measuring frequency is compared to an internally generated, settable frequency reference.

With bridge on X1-X2 the output relay deenergises when the measuring frequency is higher then the setted frequency. The relay energises again when the measuring frequency drops under the setted frequency x hysteresis.

With bridge on X2-X3 the output relay energises when the measuring frequency is higher then the setted frequency. The relay deenergises again when the measuring frequency drops under the setted frequency x hysteresis.

An indicating LED shows that the frequency signal is connected. At low frequency the LED flashes. A second LED indicates the state of the output relay.

Notes

Terminals X1, X2, X3 should only be connected together with the corresponding wire links. Do not connect external voltage, neutral or ground.

The measuring input is designed for an amplitude of AC 8...500 V. Higher values AC 12...800 V can be achieved by connecting a series resistor, type IK 5110 into the measuring circuit either to terminal n or o.

Technical data

Input

Measuring input: AC Amplitude AC 8 ... 500 V r.m.s
internal resistance: > 400 k Ω

Setting range:
5 ... 15 Hz 40 ... 120 Hz
10 ... 30 Hz 100 ... 300 Hz
20 ... 60 Hz 200 ... 600 Hz
30 ... 90 Hz

Setting: infinite on absolute scale

Response value: \geq setting value

Hysteresis: 0,8 ... 0,97 of response value

Accuracy: < $\pm 1\%$

Temperature influence: < $\pm 0,15\%$ / $^{\circ}$ C

Influence of auxiliary supply: < $\pm 0,5\%$ at 0,8 ... 1,1 U_N

Technical data

Auxiliary circuit

| | |
|---|---------------------------------|
| Auxiliary voltage U_H: | AC 24, 42, 110, 127, 230, 240 V |
| Voltage range of U_H: | 0,8 ... 1,1 U_H |
| Nominal consumption U_H: | < 3 VA |
| Nominal frequency of U_H: | 50 / 60 Hz \pm 5 % |

Output

Contacts

| | |
|-------------------------|-----------------------|
| BA 9837.11, AA 9837.11: | 1 changeover contact |
| BA 9837.12, AA 9837.12: | 2 changeover contacts |

Switching delay:

| setting range (Hz) | bridge X1-X2 | bridge X2-X3 |
|--------------------|--------------|--------------|
| 5 - 15 | 500 - 800 | 650 - 1 000 |
| 10 - 30 | 250 - 300 | 600 - 800 |
| 20 - 60 | 120 - 150 | 300 - 430 |
| setting range (Hz) | bridge X1-X2 | bridge X2-X3 |
| 30 - 90 | 90 - 120 | 280 - 400 |
| 40 - 120 | 60 - 80 | 140 - 210 |
| 100 - 300 | 25 - 45 | 70 - 120 |
| 200 - 600 | 15 - 25 | 70 - 100 |

Thermal current I_{th} :

| | | |
|---------------------------|--|---------------|
| Switching capacity | | EN 60 947-5-1 |
|---------------------------|--|---------------|

to AC 15, AC 230 V:

| | | |
|--|-----|---------------|
| | 3 A | EN 60 947-5-1 |
|--|-----|---------------|

Electrical life

to AC 15, at 3 A, AC 230 V: 2,5 x 10⁵ switching cycles

Short circuit strength

| | | |
|--------------------------|--------|---------------|
| max. fuse rating: | 4 A gL | EN 60 947-5-1 |
|--------------------------|--------|---------------|

Mechanical life: > 30 x 10⁶ switching cycles

General data

Operating mode: Continuous operation

Temperature range: - 20 ... + 60°C

Clearance and creepage distances

| | | |
|---|----------|--------------|
| overvoltage category / contamination level: | 4 kV / 2 | IEC 60 664-1 |
|---|----------|--------------|

EMC

Electrostatic discharge: 8 kV (air) EN 61 000-4-2

HF-irradiation: 10 V / m EN 61 000-4-3

Fast transients: 2 kV EN 61 000-4-4

Surge voltages

between

wires for power supply: 2 kV EN 61 000-4-5

between wire and ground: 4 kV EN 61 000-4-5

Interference suppression: Limit value class B EN 55 011

Degree of protection

Housing: IP 40 EN 60 529

Terminals: IP 20 EN 60 529

Housing: Thermoplastic with V0 behaviour

according to UL subject 94

Vibration resistance: Amplitude 0,35 mm, EN 60 068-2-6

frequency 10 ... 55 Hz, EN 60 068-1

20 / 060 / 04 EN 60 068-1

EN 50 005

Wire connection: 2 x 2,5 mm² solid or

2 x 1,5 mm² stranded wire with sleeve

DIN 46 228-1/-2/-3/-4

Wire fixing: Flat terminals with self-lifting

clamping piece EN 60 999

Screw mounting: 35 x 50 mm and

35 x 60 mm DIN 46 121

Mounting: DIN rail EN 50 022

Weight: 250 g

Dimensions

Width x height x depth: 45 x 77 x 127 mm

Standard type

BA 9837.11 30 / 90 Hz AC 230 V AC 50 / 60 HZ

Article number: 0050216

- Output: 1 changeover contact
- Measuring frequency: 30 / 90 Hz
- Auxiliary voltage U_H : 230 V
- Width: 45 mm

Variants

Frequency relay with 2 changeover contacts and internal bridges (X1, X2, X3)


BA 9837.12/010: with internal bridge X1 - X2

BA 9837.12/020: with internal bridge X2 - X3

AA 9837.12/010: with internal bridge X1 - X2

AA 9837.12/020: with internal bridge X2 - X3


Ordering example for Variants

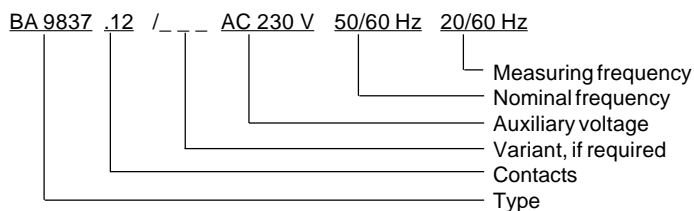

Accessories

IK 5110: Series resist or for higher measuring voltage AC 12 ... 800 V eff.

Characteristics

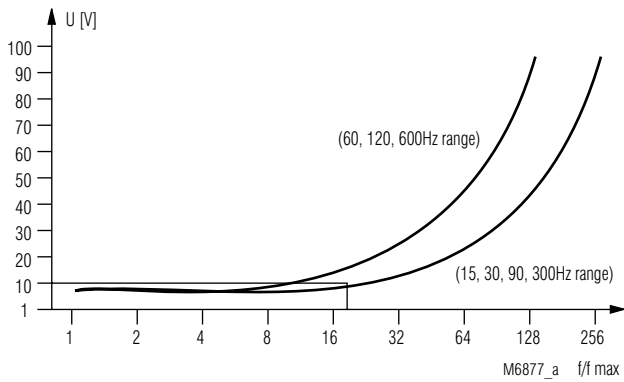

Measuring sensitivity


The diagram shows the sensitivity of the input of the frequency relay AA 9837. If the measuring voltage is lower than the curve values the frequency cannot be measured anymore. Please note. Superimposed interference voltages on the measuring input with a ration.

above the curve values can influence the measuring results.
 f - frequency on input
 f_{max} - highest value of the actual frequency range

Example:

U_{meB} : 10 V; measuring frequency: $f = 4\,800$ Hz
 chosen frequency range: 100 - 300 Hz, $f_{max} = 300$ Hz
 $\frac{f}{f_{max}} = \frac{4\,800}{300} = 16$

The measuring frequency is detected, as the measuring voltage is above the response curve.

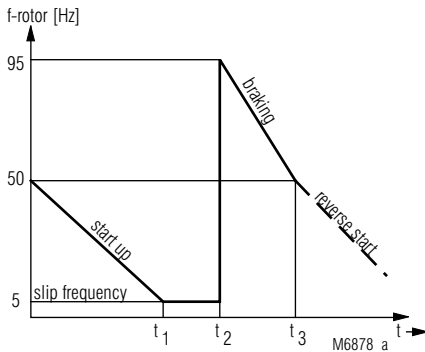


t_1 nominal speed reached
 t_2 start braking
 t_3 standstill (end of braking to avoid reverse start)

Rotor frequency at countercurrent braking

Braking:

When reversing the phases for braking the rotor frequency changes and drops proportional to the speed to mains frequency. E.g. when the rotor frequency is 5 Hz at nominal speed, it to 95 Hz. When the motor is at stand still the rotor frequency is nominal frequency. At this point the frequency relay has to give the signal to stop braking, before the motor starts up in the opposite direction.

Connection example

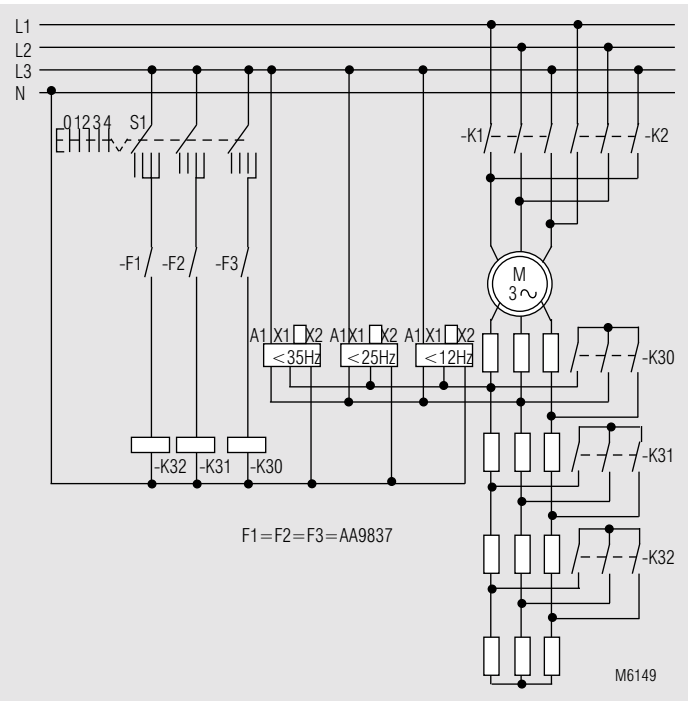

Motor control with starting resistance

Start:

To achieve an optimum speed depending starting inertia, different starting resistors are switched into the rotor circuit, when certain speed values are reached. Often this procedure is controlled with timers, but with small loads the motor reaches the speed to switch over much faster than with high loads and the motor still runs on the lower stage. When the switching of the resistors is controlled speed depending by frequency relays, the start up cycles can be shortened and the plant can be used more effectively.