



Overvoltage relay IK 9170, SK 9170 varimeter

0223314

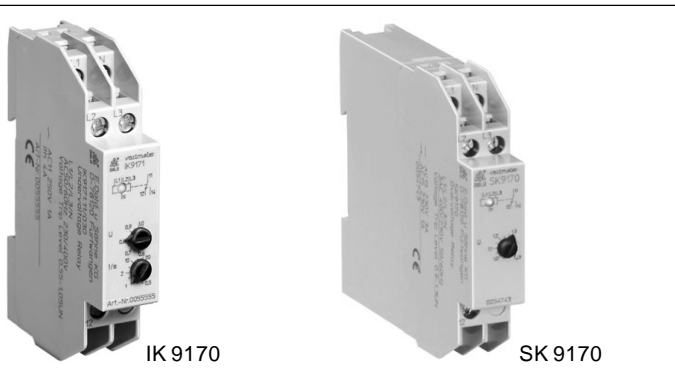


- According to IEC 255, EN 60 255, VDE 0435 part 303
- **Devices available in 2 enclosure versions:**
 - IK 9170:** depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880
 - SK 9170:** depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
- Monitoring of overvoltage in 3-phase systems
- Also for single phase
- Without auxiliary supply
- Settable response value
- N.C. circuit operation (optionally N.O. circuit operation)
- Optionally with or without N
- Optionally with delay t₁ on trip
- Optionally with delay t₂ on reset
- LED indicator for state of output relay
- Independent of phase sequence
- 1 changeover contact
- Width 17,5 mm

Function diagram

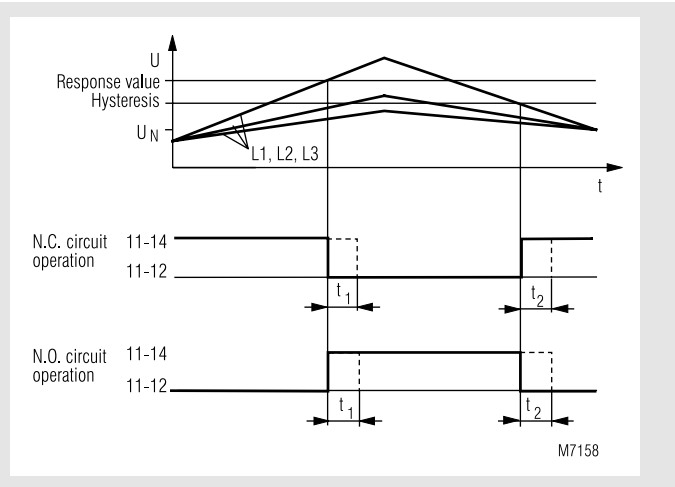

Approvals and marking



Applications

Monitors overvoltage, in 3-phase voltage systems

Notes

The arithmetic mean value of each phase is measured against N. The variants without N measure L1 and L3 against L2.

Indicators

Yellow LED: output contact active (11-14 closed)

Technical data

Input circuit

- Nominal voltage U_N:** 3/N AC 400/230 V (with neutral)
3 AC 400 V (without neutral)
- Voltage range:** 0,7 ... 1,3 U_N
- Max. overload:** 1,35 U_N, continuously
- Nominal consumption:** approx. 4 VA
- Frequency range:** 45 ... 65 Hz


Setting ranges

- Response value:** adjustable: 0,9 ... 1,3 U_N
- Hysteresis:** approx. 4 % of setting value
- Time delay t₁ / t₂:** 0,5 ... 20 s

Output

- Contacts**
- IK 9170.11, SK 9170.11: 1 changeover contact
- Thermal current I_{th}:** 4 A
- Switching capacity**
- to AC 15
- NO contact: 3 A / AC 230 V EN 60 947-5-1
- NC contact: 1 A / AC 230 V EN 60 947-5-1
- Electrical contact life**
- at AC 230 V, 1 A (cos φ = 0,5): ≥ 3 x 10⁵ switching cycles
- Short circuit strength**
- max. fuse rating:** 4 A gL EN 60 947-5-1
- Mechanical life:** ≥ 30 x 10⁶ switching cycles

Circuit diagram

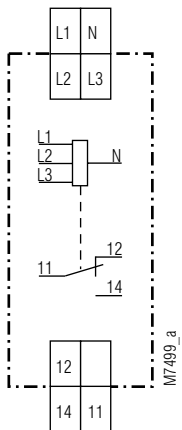

IK 9170.11, SK 9170.11

Technical data

General data

Operating mode:	Continuous operation	
Temperature range:	- 20 ... + 60°C	
Clearance and creepage distances		
overvoltage category / contamination level:	4 kV / 2	IEC 60 664-1
EMC		
Electrostatic discharge:	8 kV (air)	EN 61 000-4-2
HF irradiation:	10 V / m	EN 61 000-4-3
Fast transients:	2 kV	EN 61 000-4-4
Surge voltages between wires for power supply:	1 kV	EN 61 000-4-5
between wire and ground:	2 kV	EN 61 000-4-5
Interference suppression:	Limit value class B	EN 55 011
Degree of protection:	Housing: IP 40	EN 60 529
	Terminals: IP 20	EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0,35 mm, frequency 10 ... 55 Hz,	EN 60 068-2-6
Climate resistance:	20 / 060 / 04	EN 60 068-1
Terminal designation:	EN 50 005	
Wire connection:	2 x 2,5 mm ² solid or 2 x 1,5 mm ² stranded ferruled DIN 46 228-1/-2/-3	
Wire fixing:	Flat terminals with self-lifting clamping piece	
		EN 60 999
Mounting:	DIN rail	
		EN 50 022

Dimensions

Width x height x depth

IK 9170:	17,5 x 90 x 59 mm
SK 9170:	17,5 x 90 x 98 mm

Standard type

IK 9170.11	3/N AC 400/230V	50/60 Hz	0,9 ... 1,3 U _N
Article number:	0048645		
SK 9170.11	3/N AC 400/230V	50/60Hz	0,9 ... 1,3 U _N
Article number:	0054743		
• Adjustable response value:	0,9 ... 1,3 U _N		
• Without time delay			
• with N			
• Closed circuit operation			
• Output:	1 changeover contact		
• Nominal voltage U _N :	3/N AC 400/230 V		
• Width:	17,5 mm		

Variants

IK 9170/001	
0	N.C. circuit operation with N
1	N.C. circuit operation without N
2	N.O. circuit operation with N
3	N.O. circuit operation without N
0	without time delay
3	settable time delay t ₁
4	settable time delay t ₂
0	settable response value

Ordering example for variants

IK 9170	.11	/031	3 AC 400 V	0,9 ... 1,3 U _N	0,5 ... 20 s
					Time delay t ₁
					Setting range
					Nominal voltage
					Variant, if required
					Contact
					Type